

High Bay RE04

CE RoHS




SPECYFIKACJA


High Bay Series RE04											
Nazwa - indeks	Moc	Stopień ochrony	Napięcie	Strumień świetlny	Wydajność	CCT	Żywotność	CRI	Wymiary	Waga	Temp. Pracy
RE04-100W	100W	IP65/IK09	AC 220-240V	15.700-17.000lm	157LM/W(Ra80)-170LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	50.000h	≥80	230x157x119mm	1.5kg	od -30°C do +45°C
RE04-150W	150W	IP65/IK09	AC 220-240V	24.000-25.500lm	160LM/W(Ra80)-170LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	50.000h	≥80	270x160x122mm	2.5kg	od -30°C do +45°C
RE04-200W	200W	IP65/IK09	AC 220-240V	32.000-34.000lm	160LM/W(Ra80)-170LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	50.000h	≥80	310x160x123mm	3.3kg	od -30°C do +45°C

WYMIARY


100W

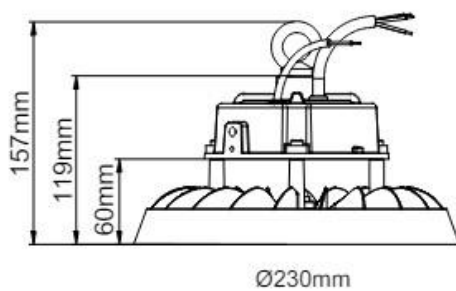


150W

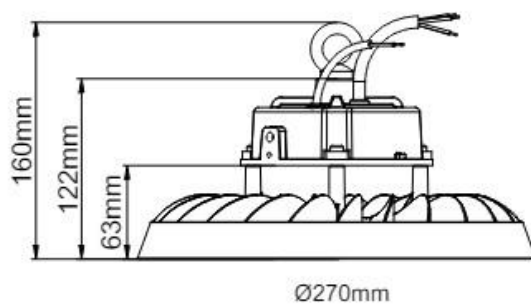

200W

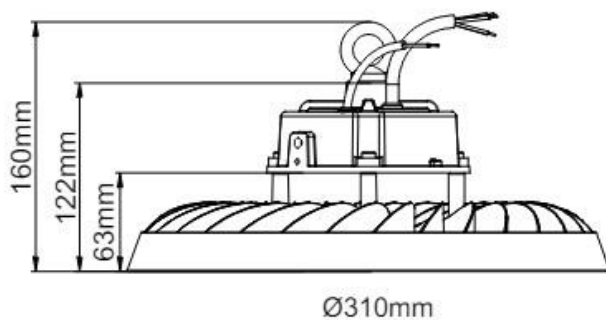

ROZSYŁ ŚWIATŁA

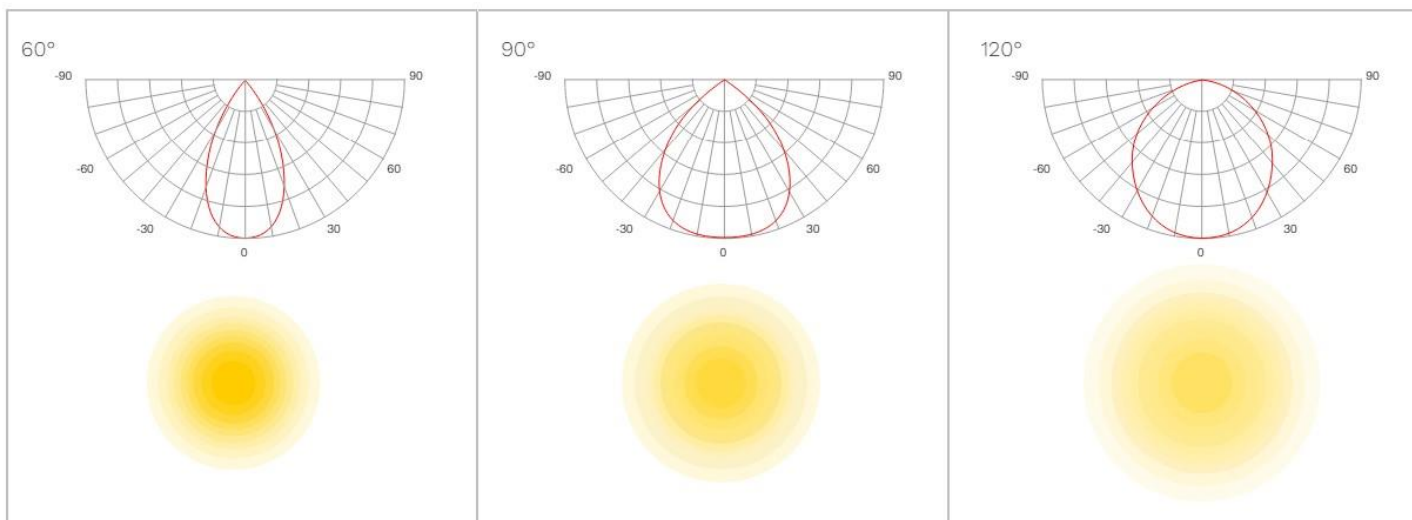

KARTA TECHNICZNA PRODUKTU



ul. Kąkolewska 21
64-100 Leszno
Tel. 511 972 370
kontakt@ledkos.pl / m.luck@ledkos.pl