

Oświetlenie Uliczne VIA V

CE RoHS




SPECYFIKACJA


VIA V										
Nazwa - Indeks	Moc	Stopień ochrony	Napięcie	Strumień świetlny	Wydajność	CCT	Żywotność	CRI	Temp. Pracy	Waga
VIA V-60W	60W	IP66/IK08	AC 120-277V	9.000-9.600lm	120LM/W(Ra80)-130LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	50.000h	≥80	od -30°C do +50°C	3.2kg
VIA V-80W	80W	IP66/IK08	AC 120-277V	12000-12.800lm	120LM/W(Ra80)-130LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	50.000h	≥80	od -30°C do +50°C	3.2kg
VIA V-100W	100W	IP66/IK08	AC 120-277V	15.000-16.000lm	120LM/W(Ra80)-130LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	50.000h	≥80	od -30°C do +50°C	4.2kg
VIA V-150W	150W	IP66/IK08	AC 120-277V	22.500-24.000lm	120LM/W(Ra80)-130LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	50.000h	≥80	od -30°C do +50°C	7.2kg
VIA V-200W	200W	IP66/IK08	AC 120-277V	30.000-32.000lm	120LM/W(Ra80)-130LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	50.000h	≥80	od -30°C do +50°C	7.2kg

WYMIARY


60W80W

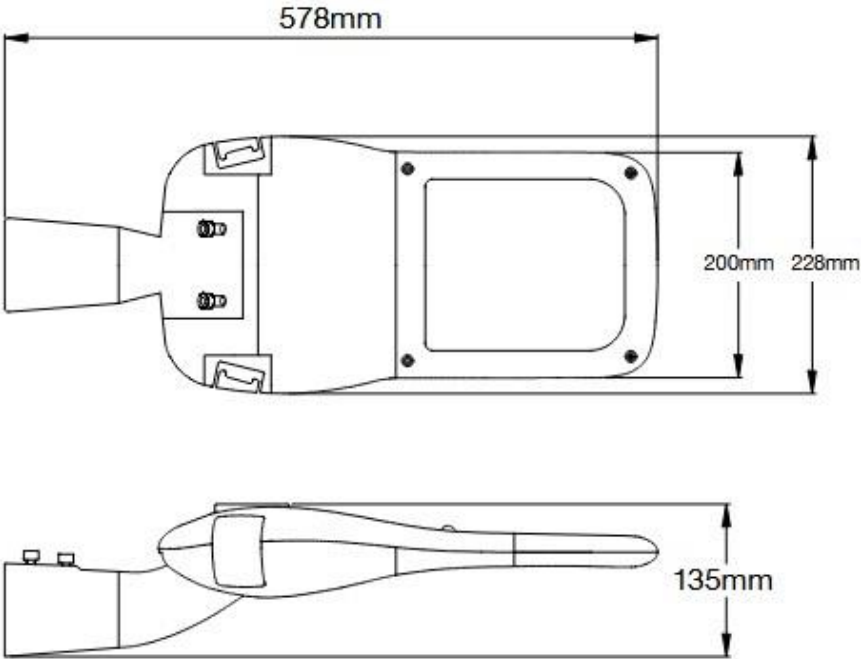




100W

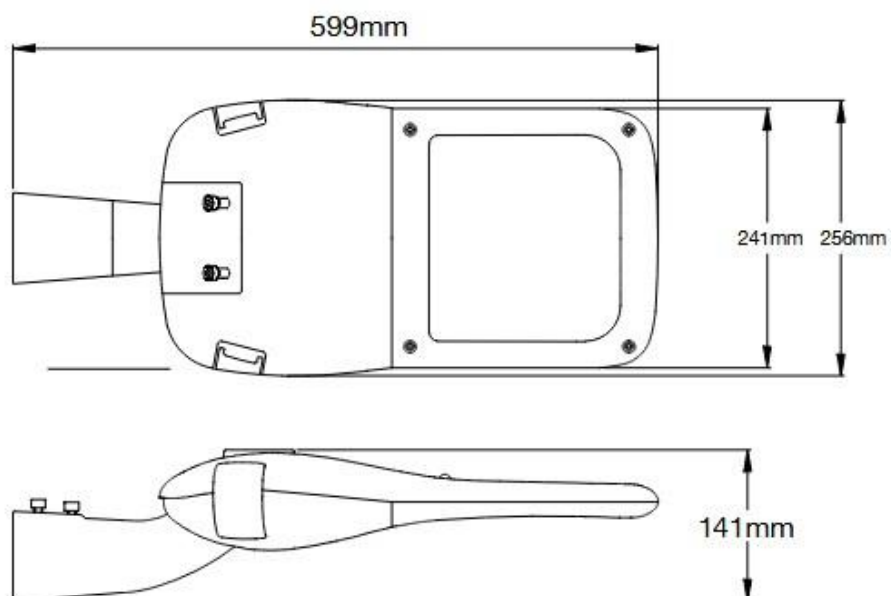

150W/200W

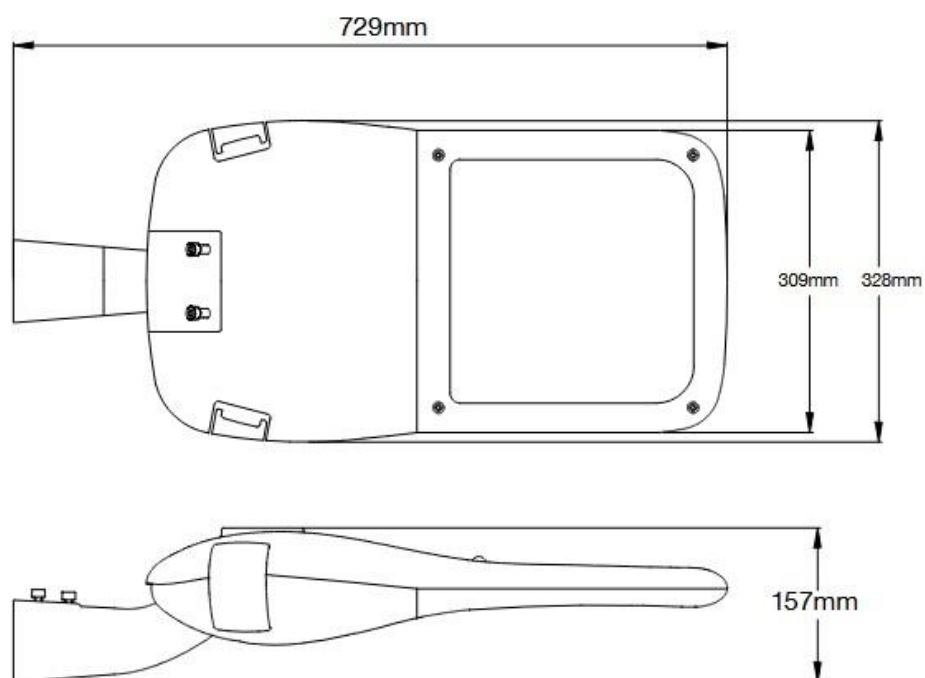

ROZSYŁ ŚWIATŁA

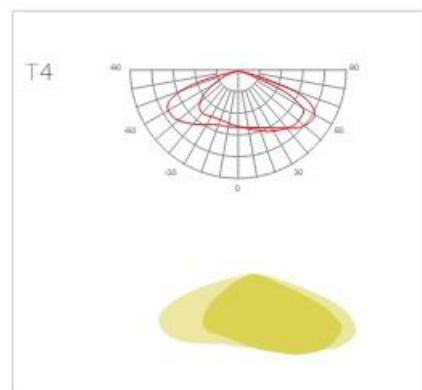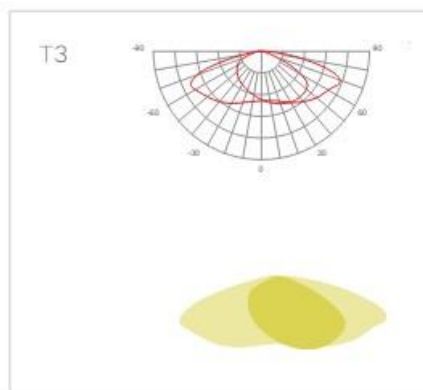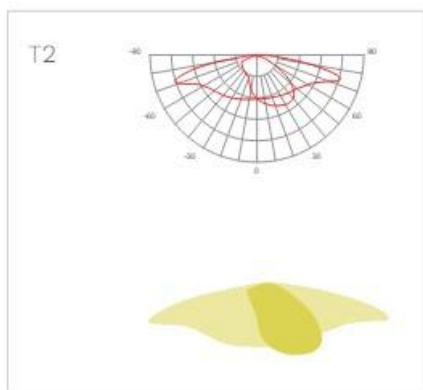

KARTA TECHNICZNA PRODUKTU



ul. Kąkolewska 21
64-100 Leszno
Tel. 511 972 370
kontakt@ledkos.pl / m.luck@ledkos.pl