

Oświetlenie - reflektor Wetor

CE RoHS




SPECYFIKACJA


Wetor											
Nazwa - indeks	Moc	Stopień ochrony	Napięcie	Strumień świetlny	Wydajność	CCT	Żywotność	CRI	Wymiary	Waga	Temp. Pracy
Wetor-50	50W	IP66/IK07	AC 120-277V	7000-8000lm	150LM/W(Ra80)-160LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	30.000-100.000h	≥70	268x230x47mm	3.0kg	od -30°C do +45°C
Wetor-100	100W	IP66/IK07	AC 120-277V	16000-17000lm	160LM/W(Ra80)-170LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	30.000-100.000h	≥70	328x361x55mm	3.5kg	od -30°C do +45°C
Wetor-150	150W	IP66/IK07	AC 120-277V	24000-25000lm	160LM/W(Ra80)-170LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	30.000-100.000h	≥70	406x361x57mm	4.5kg	od -30°C do +45°C
Wetor-200	200W	IP66/IK07	AC 120-277V	32000-34000lm	160LM/W(Ra80)-170LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	30.000-100.000h	≥70	468x363x58mm	5.2kg	od -30°C do +45°C
Wetor-300	300W	IP66/IK07	AC 120-277V	48000-51000lm	160LM/W(Ra80)-170LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	30.000-100.000h	≥70	542x423x71mm	10.3kg	od -30°C do +45°C
Wetor-400	400W	IP66/IK07	AC 120-277V	60000-64000lm	150LM/W(Ra80)-160LM/W(Ra80)	3000K / 4000K / 5000K / 5700K / 6500K	30.000-100.000h	≥70	542x423x71mm	10.3kg	od -30°C do +45°C
Wetor-500	500W	IP66/IK07	AC 120-277V	80000-85000lm	160LM/W(Ra80)-170LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	30.000-100.000h	≥70	656x521x83mm	15.7kg	od -30°C do +45°C
Wetor-600	600W	IP66/IK07	AC 120-277V	90000-96000lm	150LM/W(Ra80)-160LM/W(Ra70)	3000K / 4000K / 5000K / 5700K / 6500K	30.000-100.000h	≥70	656x521x83mm	15.7kg	od -30°C do +45°C

Wymiary


50W

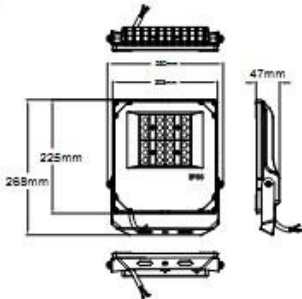

100W

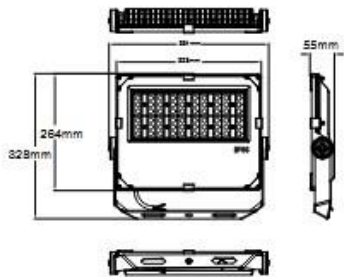


150W

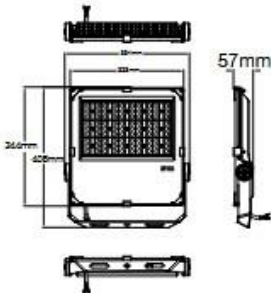


200W



300W/400W

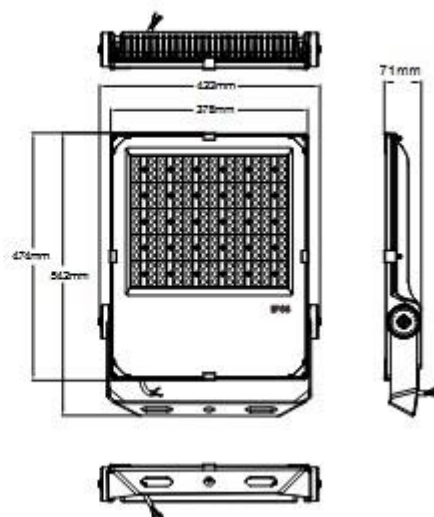

500W/600W

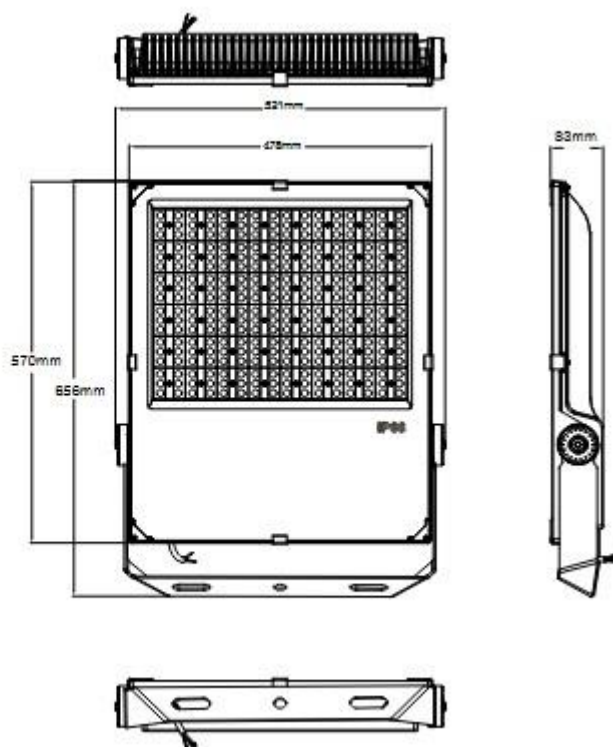

KARTA TECHNICZNA PRODUKTU